


Biometric Full Height Turnstile

FHT2400D: Full Height Turnstile

FHT2411D: Full Height Turnstile with RFID Access Control System

FHT2422D: Full Height Turnstile with Fingerprint and RFID Access Control System

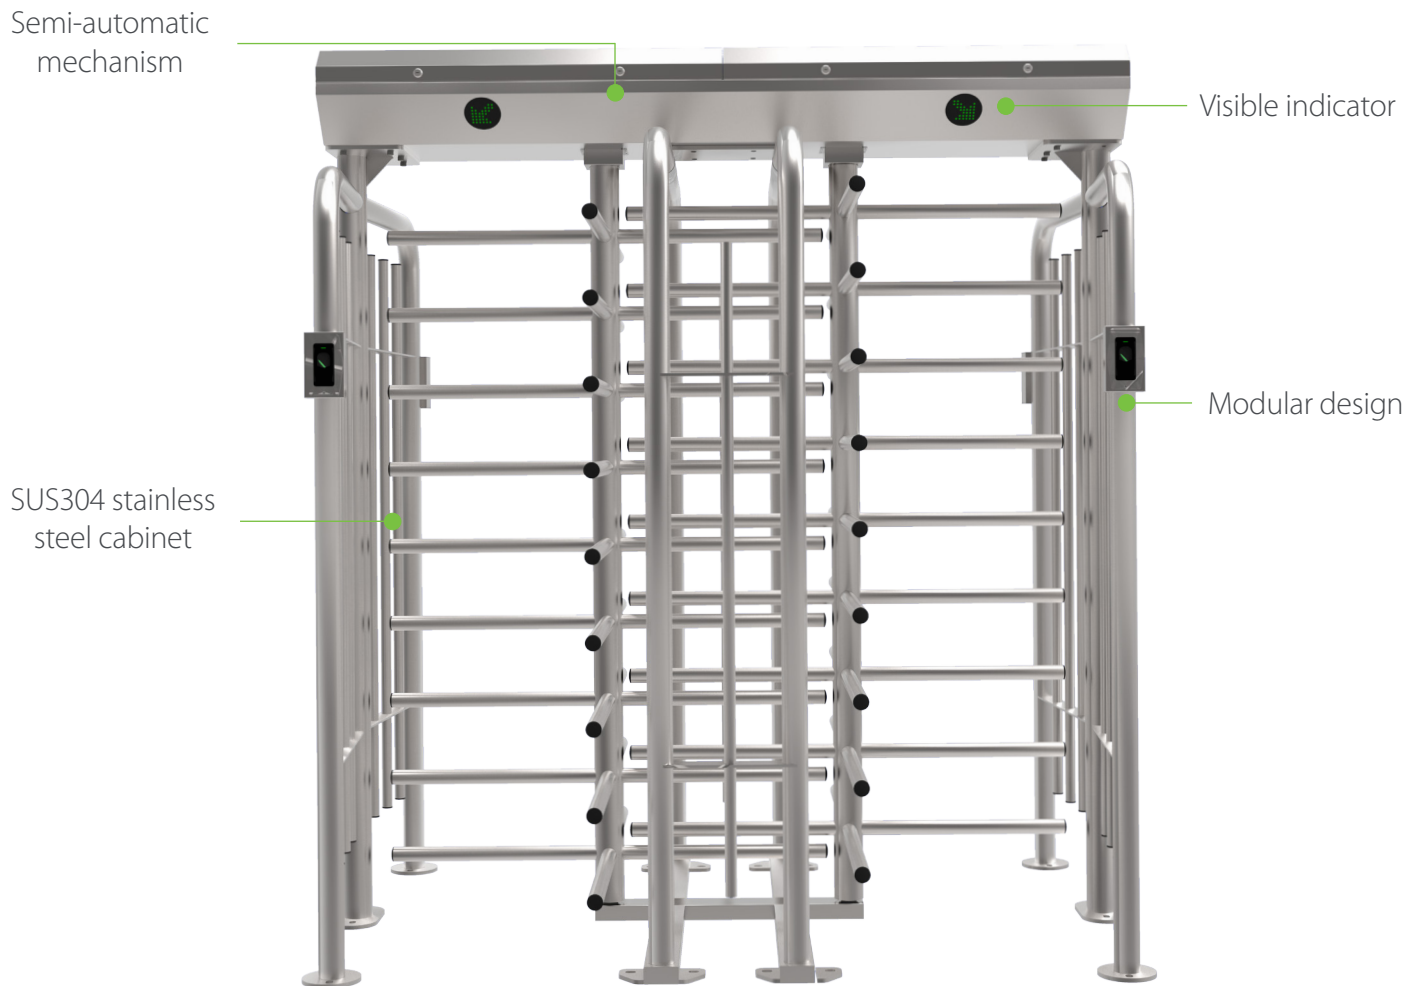

Application



Industrial facilities



Corporate security



Government security






Public transportation

Specifications

| | | |
|---------------------|------------------------|--------------------|
| Power requirements | AC110V/220V, 50/60Hz | |
| Working temperature | -28°C ~ 60°C | |
| Working humidity | 0% ~ 95% | |
| Working environment | Indoor/ Outdoor | |
| Speed of throughput | RFID | Maximum 30/ minute |
| | Fingerprint | Maximum 25/ minute |
| | Face | Maximum 15/ minute |
| | Vein | Maximum 15/ minute |
| Lane width (mm) | 580 | |
| Footprint (mm * mm) | 2018 * 1324 | |
| Dimension (mm) | L=2018 W=1324 H=2220 | |
| LED indicator | Y | |
| Cabinet material | SUS304 Stainless Steel | |
| Barrier material | SUS304 Stainless Steel | |
| Barrier movement | Rotating | |
| Emergency mode | Y | |
| Security level | High | |
| MCBF | 2 million | |
| Ingress protection | IP54 | |

Dimensions (mm)

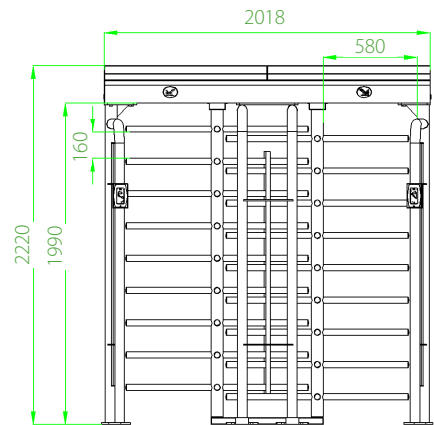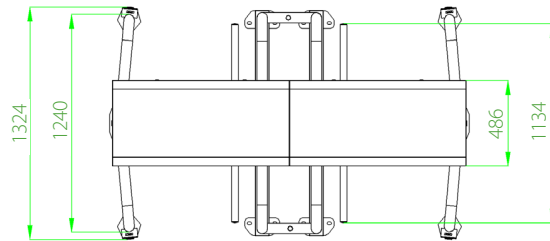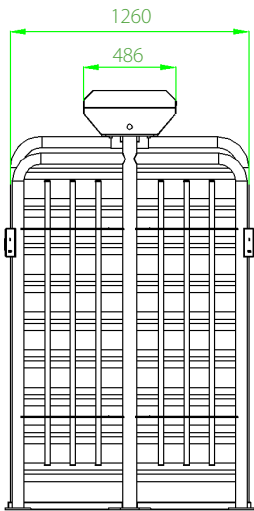

More details

ZKTECO CO.,LTD.
E-mail: sales@zkteco.com
www.zkteco.com

© Copyright 2018, ZKTECO CO., LTD. ZKTECO Logo is a registered trademark of ZKTECO CO., LTD. or a related company. All other products and company names mentioned are used for identification purposes only and may be the trademarks of their respective owners. All specifications are subject to change without notice. All rights reserved.

